

## CL989TR

Fully-automatic Tilting Type



10-21"  
External clamping



12-24"  
Internal clamping



≤1000mm (39")  
Max.wheel diameter




≤355mm (14")  
Max.wheel width

### FEATURES

#### INDEPENDENT 006 HELP ARM SYSTEM

4 auxiliary functions for mounting/  
demounting tyres.

- 1 Helps to lift heavy tires
- 2 Central positioning provides simple clamping
- 3 Nylon pressing roller allows the separation of tire and rim easily

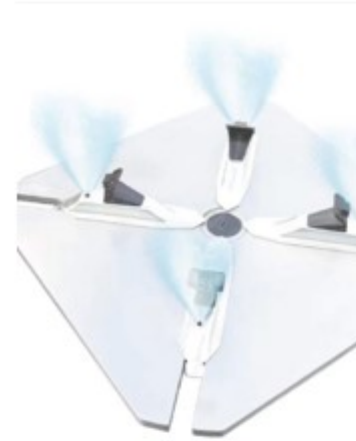

**Air boosters in Clamping Jaws to inflate tubeless tyres in an instant**

### PARAMETERS

Air supply pressure	8-10bar (116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Noise level	≤75 dB
N/G weight (006)	66/77 kg(145/169 lbs)
Package dimension (006)	1230*450*350mm (4.0*1.5*1.2ft)
N/G weight	295/332 kg(649/731 lbs)
Package dimension	1080*960*760mm (3.5*3.1*2.5ft)

