

A blue two-post car lift is shown in a garage. A red arrow points from the top of the lift to the ceiling, indicating a height measurement. The text '5029mm' is overlaid on the image. The lift has 'CLASSICLIFT' and '5500KG' labels. The garage has a corrugated metal wall and a concrete floor.

5029mm

Classic CL5500C 2 Post 5.5 Tonne Clearfloor



Classic CL5500C

This 2 Post Hoist CL5500C Overall Height 5029mm is a commercial-grade lift designed to accommodate both long wheelbase trucks and passenger cars. The distance between the symmetrical columns is almost 2829mm with a drive-through space of over 2787mm. The extra distance between the symmetrical columns will allow the widest of vehicles to be lifted. The increased length of the symmetrical arms coupled with the additional height of the included peg style truck adapter set allows the operator to raise long-wheelbase trucks with a variety of running boards safely.

Classic CL5500C



- 12,000 Lb. Capacity
- Dual hydraulic direct-drive cylinders, designed and made on ANSI standard, high-quality NOK seals
- 3/8" aircraft quality cable is used for synchronization
- Self-lubricating UHMW Polyethylene sliders and bronze bush
- Single-point safety release
- Clearfloor design, provide unobstructed floor space
- Overhead safety shut-off device
- Adjustable double screw lift pads are included with the Classic CL5500C
- Adjustable three height setting accommodate varying service ceiling heights (The special low setting height 150" need to choose the optional cables)
- Automatic arms restraints


Warranty:

1 Year Warranty on electrical and hydraulics including Hoist Rams / 5-year structural warranty.

Registered with Worksafe

If you are unsure of the integrity thickness of your concrete floor, We have extensions to increase the column base surface area that is anchored to the floor

Classic CL5500C SPECIFICATION

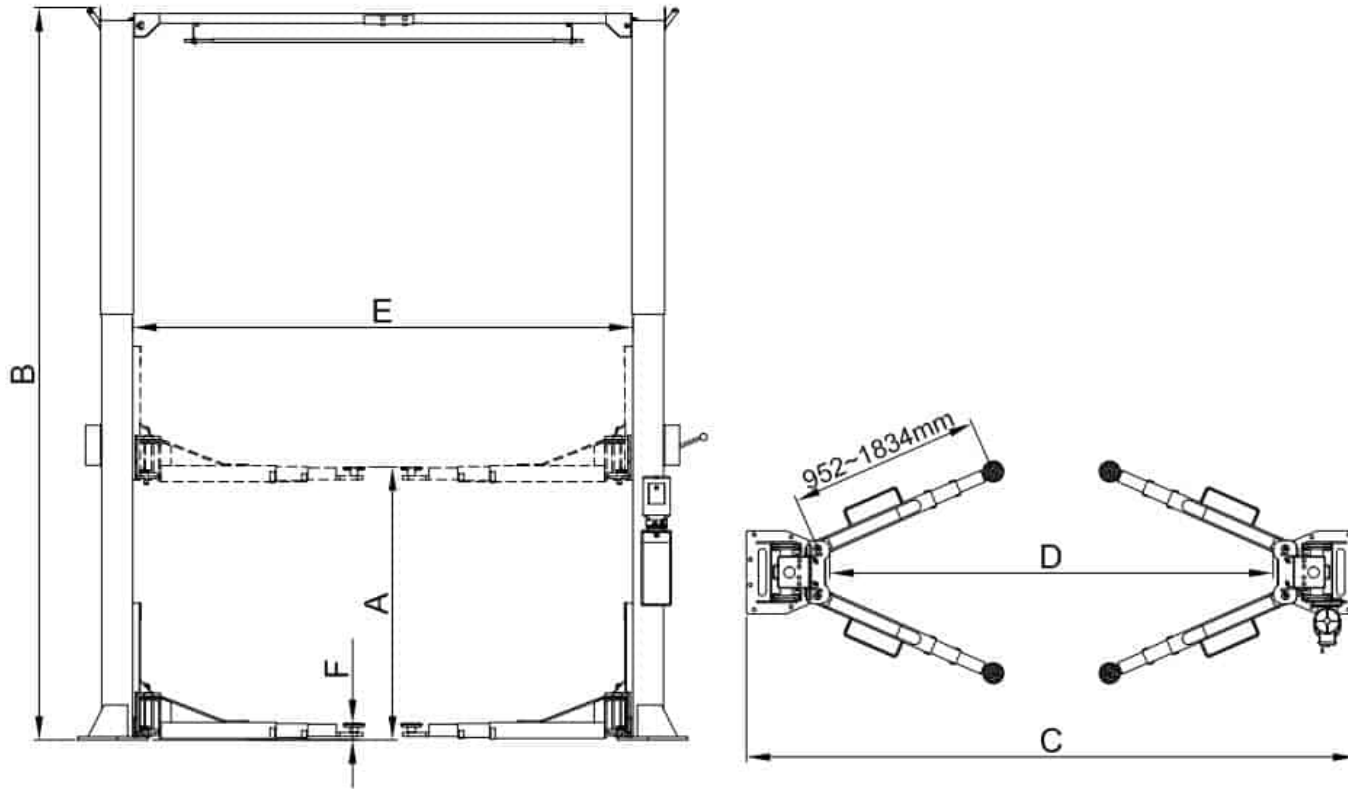

| | | |
|-----------------------|---|--------------------------|
| Classic CL5500C | | Clearfloor Direct-driven |
| Lifting Capacity | | 5500kg (12,000 lbs) |
| Lifting Time | | 69 Seconds |
| Lifting Height | A | 1842-2071mm |
| Overall Height | B | 4420/5029mm |
| Overall Width | C | 3829mm |
| Drive-Thru Clearance | D | 2787mm |
| Width Between Columns | E | 3137mm |
| Minimum Pad Height | F | 115mm |
| Gross Weight | | 1066Kg (2,350 lbs) |
| Motor | | 4.0HP |